


**50 Lbs.**  
**(22.7 KG)**

**DEMAND**

**Easy-Coat™**

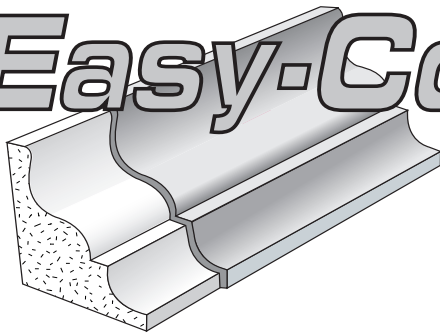

**EPS Foam  
Coating  
System**

**✓ Coats and Bonds to Foam, Metal, Stucco and Wood ✓ No Mesh Required**

#### **Mixing Instructions —**

- Read directions thoroughly before proceeding.
- Each 50-pound bag will generally require 1 to 1.5 gallons of clean water depending on the application.
- It is recommended that a mechanical mixing device be used.
- Start with  $\frac{3}{4}$  to 1 gallon of clean water.
- Add bag of Easy-Coat and mix until Easy-Coat is thoroughly saturated.
- Add the balance of the required water and mix for 5 minutes. Be sure that the product is thoroughly mixed.
- Let the blended Easy-Mix sit for 10 minutes, then remix to break the set before Easy-Mix is applied.

#### **Machine Extrusion Instructions —**

- Follow procedure for normal mixing. Be sure to let it set for 10 minutes then remix to break the set.
- You must obtain a creamy consistency (like pancake batter) for proper machine application.
- When coatings over  $\frac{3}{16}$ " are desired, 2 coats may be needed. Allow the first coat to dry before applying second coat.
- All coated shapes should be moist cured and allowed to dry in a shaded non-windy area.

#### **Surface Coating —**

- Easy-Coat can be applied either by machine or by hand.

#### **Clean Up —**

- Clean all tools and equipment immediately after use with water or Concrete & Stucco Killer™ from Demand.

#### **Coverage —**

- One 50-pound bag will cover approximately 40-60 square feet at  $\frac{1}{8}$ " to  $\frac{3}{16}$ ".

#### **Other Applications —**

- When using Easy-Coat as an adhesive, it should be mixed to a semi-paste like consistency.
- When used as an adhesive, test a piece by placing it in position and examining it after 24 hours.
- Dampen the substrate, apply approximately  $\frac{1}{4}$ " of Easy-Coat to the entire back surface of the applied shape.
- Set the foam shape into position over the substrate, press evenly over the entire shape. This normally will hold the shape in place. On larger shapes, it may be necessary to provide additional support.
- 4" fiberglass mesh joint tape should be embedded on all joints.
- Apply stucco finish products after the surface has fully cured.

#### **SAFETY**

Contains Portland cement. Wear rubber gloves and eye protection. Avoid eye contact or prolonged contact with skin. If eye contact occurs, flush with water for 15 minutes. Consult physician immediately. This product contains free silica. Do not breathe dust; wear NIOSH approved respirator.

**KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY.**

#### **DISCLAIMER OF WARRANTY**

Demand Products, Inc. is making no recommendation for the use and purpose for which this product may be utilized. No guarantee of results are made as the conditions of installation are beyond our control. No representations or warranties, either express or implied, are made with respect to this product and its uses beyond the description on the face hereof, and in particular there are no implied warranties of merchantability or fitness for a particular purpose. Under no circumstances will Demand Products, Inc. be liable for consequential damages, or any damages in excess of the purchase price of this product.

#### **PRODUCT DISCLAIMER**

- Please Note: *This product is not intended to be used as a full thickness stucco system.*




**DEMAND**

P R O D U C T S I N C .  
EIFS • FOAM CUTTING • AAC • SIPs • ICF

1055 Nine North Dr.  
Alpharetta, GA 30004 USA

**1-800-325-7540**

**50 Lbs.  
(22.7 KG)**

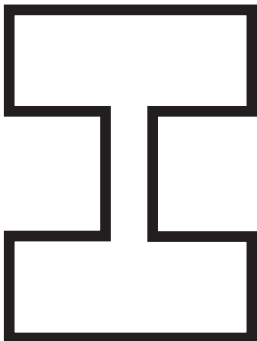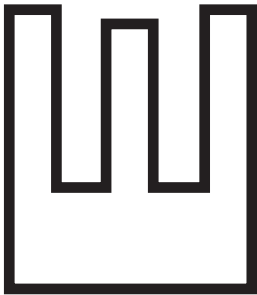

**✓ Coats and Bonds to Foam, Metal, Stucco and Wood ✓ No Mesh Required**

#### **Mixing Instructions —**

- Read directions thoroughly before proceeding.
- Each 50-pound bag will generally require 1 to 1.5 gallons of clean water depending on the application.
- It is recommended that a mechanical mixing device be used.
- Start with  $\frac{3}{4}$  to 1 gallon of clean water.
- Add bag of Easy-Coat and mix until Easy-Coat is thoroughly saturated.
- Add the balance of the required water and mix for 5 minutes. Be sure that the product is thoroughly mixed.
- Let the blended Easy-Mix sit for 10 minutes, then remix to break the set before Easy-Mix is applied.

#### **Machine Extrusion Instructions —**

- Follow procedure for normal mixing. Be sure to let it set for 10 minutes then remix to break the set.
- You must obtain a creamy consistency (like pancake batter) for proper machine application.
- When coatings over  $\frac{3}{16}$ " are desired, 2 coats may be needed. Allow the first coat to dry before applying second coat.
- All coated shapes should be moist cured and allowed to dry in a shaded non-windy area.

#### **Surface Coating —**

- Easy-Coat can be applied either by machine or by hand.

#### **Clean Up —**

- Clean all tools and equipment immediately after use with water or Concrete & Stucco Killer™ from Demand.

#### **Coverage —**

- One 50-pound bag will cover approximately 40-60 square feet at  $\frac{1}{8}$ " to  $\frac{3}{16}$ ".

#### **Other Applications —**

- When using Easy-Coat as an adhesive, it should be mixed to a semi-paste like consistency.
- When used as an adhesive, test a piece by placing it in position and examining it after 24 hours.
- Dampen the substrate, apply approximately  $\frac{1}{4}$ " of Easy-Coat to the entire back surface of the applied shape.
- Set the foam shape into position over the substrate, press evenly over the entire shape. This normally will hold the shape in place. On larger shapes, it may be necessary to provide additional support.
- 4" fiberglass mesh joint tape should be embedded on all joints.
- Apply stucco finish products after the surface has fully cured.

#### **SAFETY**

Contains Portland cement. Wear rubber gloves and eye protection. Avoid eye contact or prolonged contact with skin. If eye contact occurs, flush with water for 15 minutes. Consult physician immediately. This product contains free silica. Do not breathe dust; wear NIOSH approved respirator.

**KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY.**

#### **DISCLAIMER OF WARRANTY**

Demand Products, Inc. is making no recommendation for the use and purpose for which this product may be utilized. No guarantee of results are made as the conditions of installation are beyond our control. No representations or warranties, either express or implied, are made with respect to this product and its uses beyond the description on the face hereof, and in particular there are no implied warranties of merchantability or fitness for a particular purpose. Under no circumstances will Demand Products, Inc. be liable for consequential damages, or any damages in excess of the purchase price of this product.

#### **PRODUCT DISCLAIMER**

- Please Note: *This product is not intended to be used as a full thickness stucco system.*

**DEMAND**

PRODUCTS INC.  
EIFS • FOAM CUTTING • AAC • SIPs • ICF

1055 Nine North Dr.  
Alpharetta, GA 30004 USA

**1-800-325-7540**